



# EMC TEST REPORT

**Report No.:** SET2018-15203

**Product Name:** Wireless data transceiver

**FCC ID:** 2ACRAHX-DU8616D

**Main Model No. :** HX-DU8616D

**Series Model:** HX-DU86XXD(XX=17~27)

**Applicant:** HARXON CORPORATION

**Address:** 6/F, Block B, D3 Building, TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, 518055, PRC

**Received Date:** 2018-10-10

**Tested Date:** 2018-10-15—2018-10-16

**Issued by:** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

**Lab Location:** Building 28/29, East of Shigu Xili Industrial Zone, Nanshan District Shenzhen, Guangdong 518055, China

**Tel:** 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **18** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product Name** ..... : Wireless data transceiver

**Model No.** ..... : HX-DU8616D

**Applicant**..... : HARXON CORPORATION

**Applicant Address**..... : 6/F, Block B, D3 Building, TCL International E City, No.  
1001 Zhongshanyuan Road, Nanshan District, Shenzhen,  
518055, PRC

**Manufacturer**..... : HARXON CORPORATION

**Manufacturer Address** ..... : 6/F, Block B, D3 Building, TCL International E City, No.  
1001 Zhongshanyuan Road, Nanshan District, Shenzhen,  
518055, PRC

**Test Standards**..... : 47 CFR Part 15 Subpart B: Radio Frequency Devices

**Test Result** ..... : PASS

**Tested by** ..... : Yun Lei Fang  
Yun Lei Fang Test Engineer 2018.11.28

**Reviewed by**..... : Chris You  
Chris You Senior Engineer 2018.11.28

**Approved by** ..... : Zhu Qi  
Zhu Qi, Manager 2018.11.28



### TABLE OF CONTENTS

- 1. GENERAL INFORMATION .....4**
- 1.1 EUT Description .....4**
- 1.2 Test Standards and Results .....5**
- 1.3 Facilities and Accreditations .....6**
- 1.3.1 Facilities .....6
- 1.3.2 Test Environment Conditions .....6
- 1.3.3 Measurement Uncertainty .....6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Peripherals .....7**
- 2.2 Test Mode .....7**
- 2.3 Test Setup and Equipments List.....7**
- 2.3.1 Conducted Emission.....7
- 2.3.2 Radiated Emission.....9
- 3. 47 CFR PART 15B REQUIREMENTS ..... 11**
- 3.1 Conducted Emission ..... 11**
- 3.1.1 Requirement ..... 11
- 3.1.2 Test Description ..... 11
- 3.1.3 Test Result ..... 11
- 3.2 Radiated Emission .....14**
- 3.2.1 Requirement .....14
- 3.2.2 Test Description ..... 15
- 3.2.3 Test Result ..... 15

Change History		
Issue	Date	Reason for change
1.0	2018.11.28	First edition



## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Name ..... : Wireless data transceiver

FCC ID..... : 2ACRAHX-DU8616D

Trade Name..... : HARXON

Brand Name..... : HARXON

Hardware Version..... : V1R1

Software Version ..... : E025.00.00

*Note 1:* The EUT is a Wireless data transceiver;

*Note 2:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

*Note 4:* the main model and the series model only model name is different.



## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2017	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

#### **CNAS-Lab Code: L1659**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8\*6.8\*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

#### **NVLAP Lab Code: 201008-0**

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

#### **FCC-Registration No.: CN5031**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2018.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)



## 2. TEST CONDITIONS SETTING

### 2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

#### Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

#### Support Cable:


Description	Shield Type	Ferrite Core	Length
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

### 2.2 Test Mode

The EUT configuration of the emission tests is EUT Traffic( BT, Radio) + PC.

### 2.3 Test Setup and Equipments List

#### 2.3.1 Conducted Emission

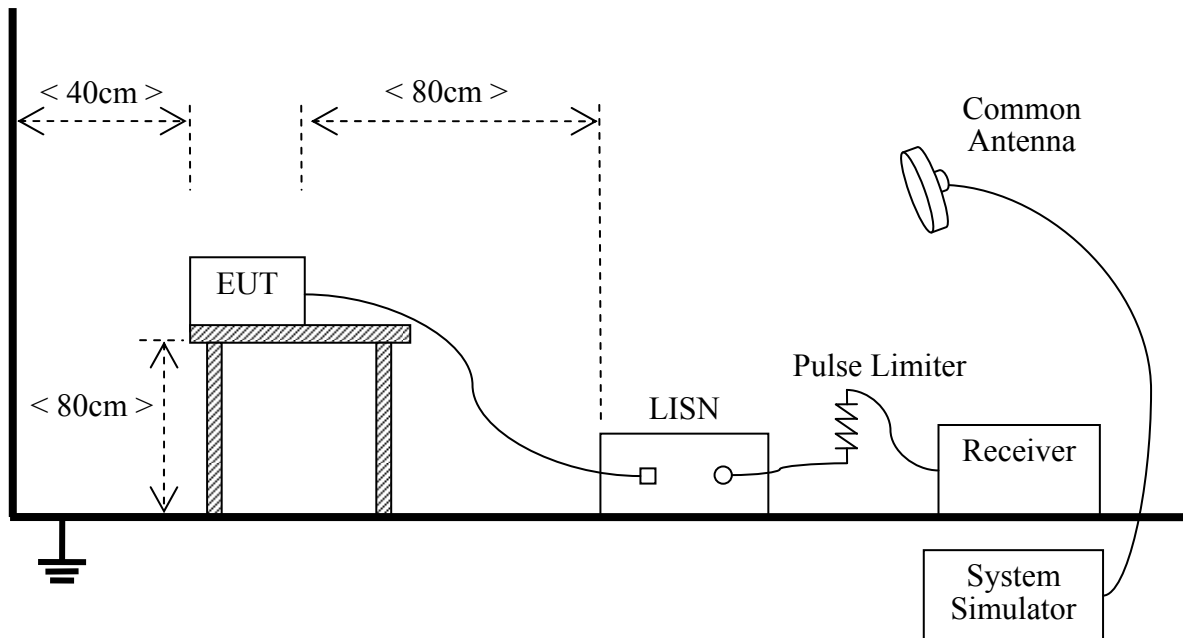**A. Test Setup:**


The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

**B. Equipments List:**


Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2017.12.13	2018.12.13
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2018.01.08	2019.01.08
Cable	MATCHING PAD	W7	/	2018.04.01	2019.04.01



### 2.3.2 Radiated Emission

#### A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

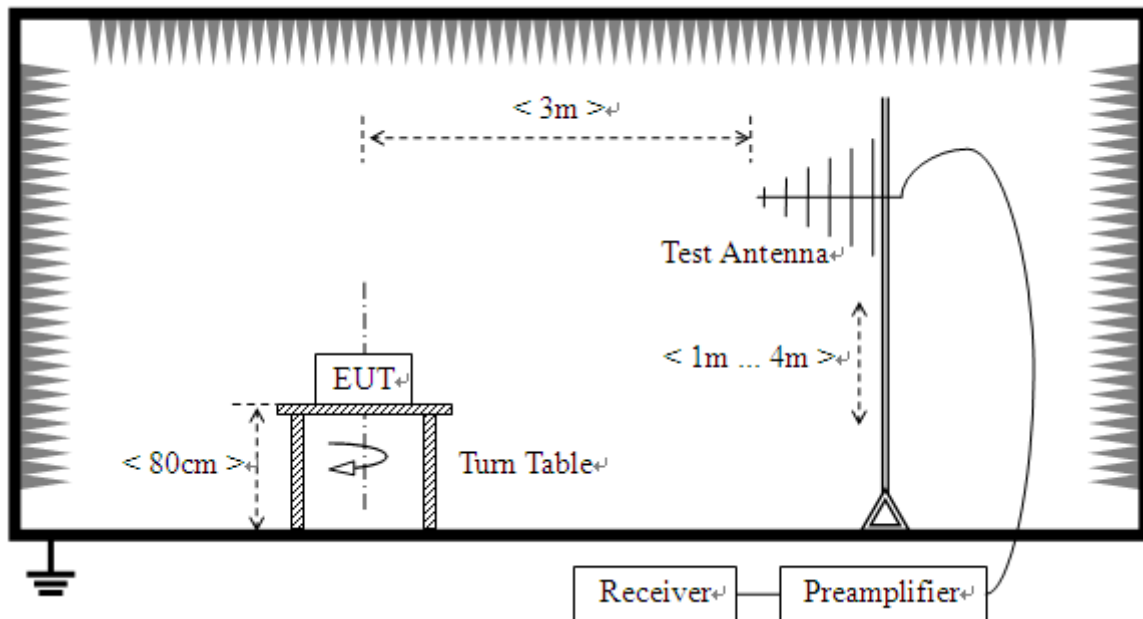

#### B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**C. Equipments List:**

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2018.08.05	2019.08.05
Semi-Anechoic Chamber	Albatross	9m*6m*6m	A0412372	2018.05.09	2019.05.09
Test Antenna - Bi-Log	ETC	MCTD 2786	A150402239	2018.06.10	2019.06.10
Test Antenna – Horn	ROHDE&SCHWARZ	HF906	A0304225	2018.05.26	2019.05.26
Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4 m	A0304210	2018.05.09	2019.05.09
Amplifier 1G~18GHz	ROHDE&SCHWARZ	MITEQ AFS42-0010 1800	A0509366	2018.06.04	2019.06.04
Amplifier 20M~3GHz	Compliance Direction System	PAP-0203H	A0509377	2018.06.04	2019.06.04
Cable	SUNHNER	SUCOFLEX 100	/	2018.06.04	2019.06.04
Cable	SUNHNER	SUCOFLEX 104	MY1758/4	2018.06.04	2019.06.04



### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Conducted Emission

##### 3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**Note:**

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2 Test Description

See section 2.3.1 of this report.

##### 3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

**Note:**

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

**Test voltage and frequency (120V AC,60Hz)**


**A. Mains terminal disturbance voltage, L phase**

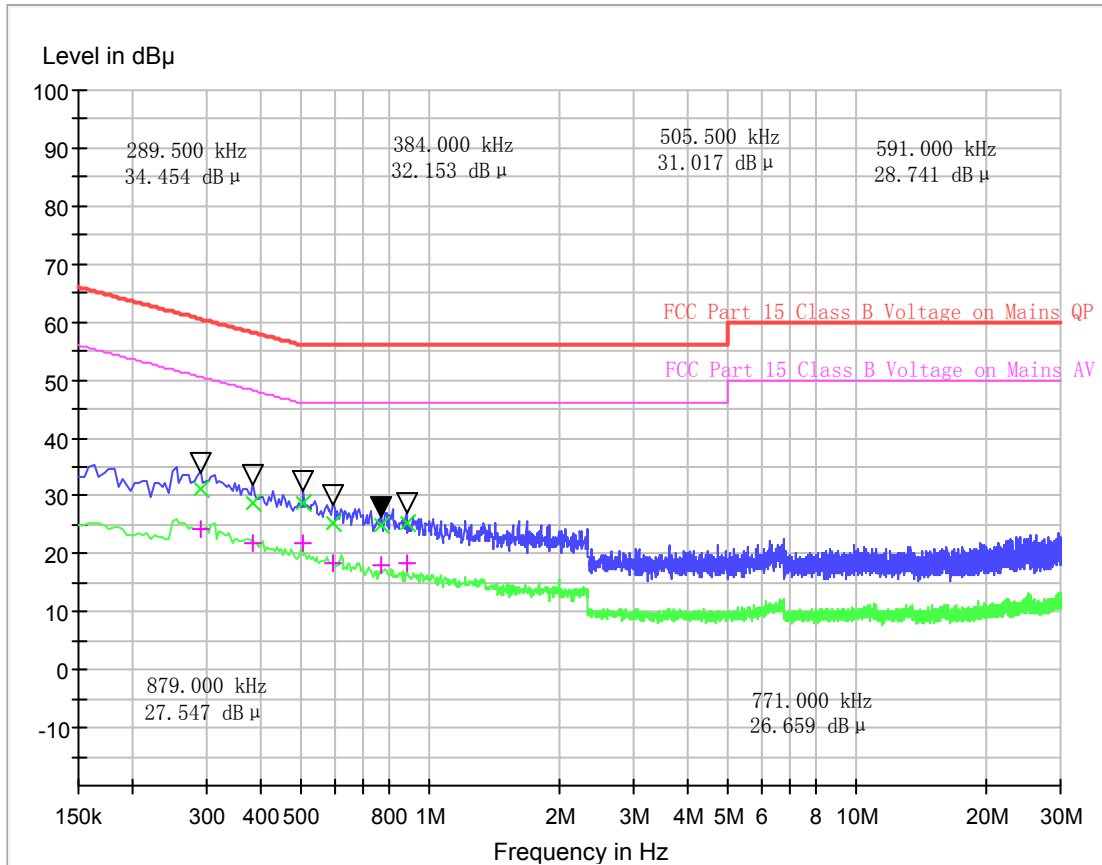

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals							
L Test Data							
QP				AV			
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)
0.289500	60.5	31.16	29.38	0.289500	50.5	24.37	26.17
0.384000	58.2	28.75	29.44	0.384000	48.2	21.86	26.33
0.505500	56.0	28.67	27.33	0.505500	46.0	21.77	24.23
0.591000	56.0	25.43	30.57	0.591000	46.0	18.48	27.52
0.771000	56.0	24.91	31.09	0.771000	46.0	18.13	27.87
0.879000	56.0	25.31	30.69	0.879000	46.0	18.45	27.55

**B. Mains terminal disturbance voltage, N phase**

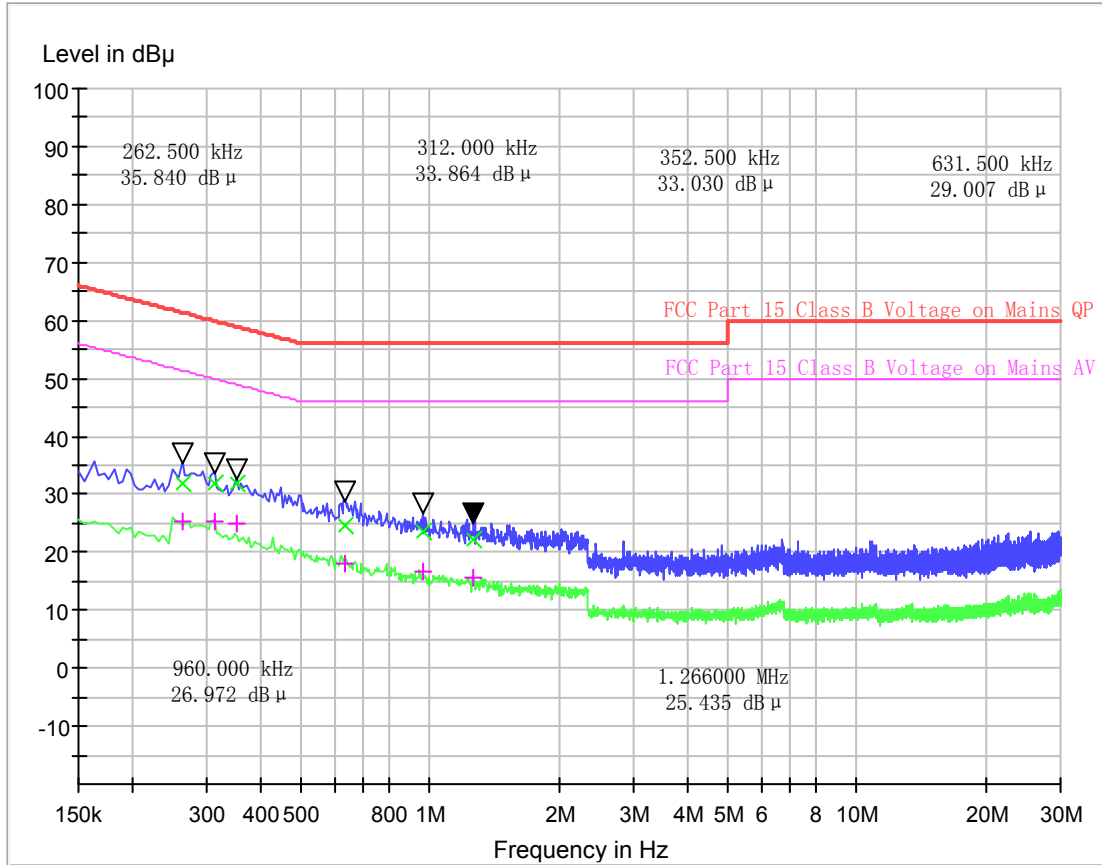

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals							
N Test Data							
QP				AV			
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)
0.262500	61.4	32.03	29.32	0.262500	51.4	25.17	26.18
0.312000	59.9	31.80	28.12	0.312000	49.9	25.24	24.68
0.352500	58.9	31.71	27.19	0.352500	48.9	25.09	23.81
0.631500	56.0	24.77	31.23	0.631500	46.0	17.96	28.04
0.960000	56.0	23.44	32.56	0.960000	46.0	16.75	29.25
1.266000	56.0	22.27	33.73	1.266000	46.0	15.55	30.45

**Test Result: PASS**

## 3.2 Radiated Emission

### 3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	( $\text{uV/m}$ )	( $\text{dBuV/m}$ )
0.009 - 0.490	2400/F(kHz)	300m	10000* 2400/F(kHz)	20log 2400/F(kHz) + 80
0.490 - 1.705	2400/F(kHz)	30m	100* 2400/F(kHz)	20log 2400/F(kHz) + 40
1.705 - 30.00	30	30m	100*30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;PK detector RBW 1MHz, VBW 1Hz for AV value.

#### Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in  $\text{dBuV/m}$  is calculated by  $20\log \text{Emission Level}(\text{uV/m})$ .
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is  $30\text{uV/m}$ , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$



### **3.2.2 Test Description**

See section 2.3.2 of this report.


### **3.2.3 Test Result**

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

**C. Radiation disturbances, antenna polarization:Vertical**

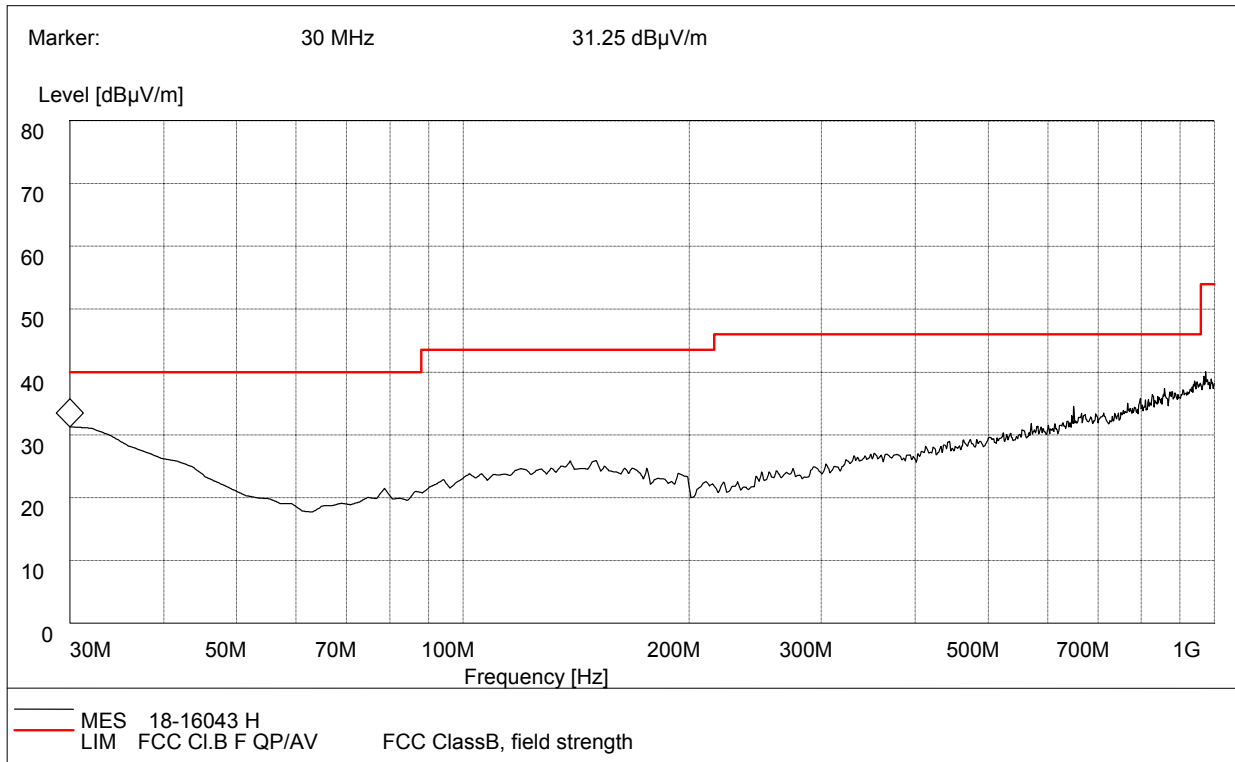


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Antenna	Verdict
30.01	30.21	120.000	100.0	40.00	Vertical	Pass
138.85	25.81	120.000	120.0	43.50	Vertical	Pass
175.79	24.70	120.000	117.0	43.50	Vertical	Pass
463.49	29.12	120.000	149.0	46.00	Vertical	Pass
650.1	34.53	120.000	120.0	46.00	Vertical	Pass
858.1	37.33	120.000	121.0	46.00	Vertical	Pass





**D. Radiation disturbances, antenna polarization: Horizontal**

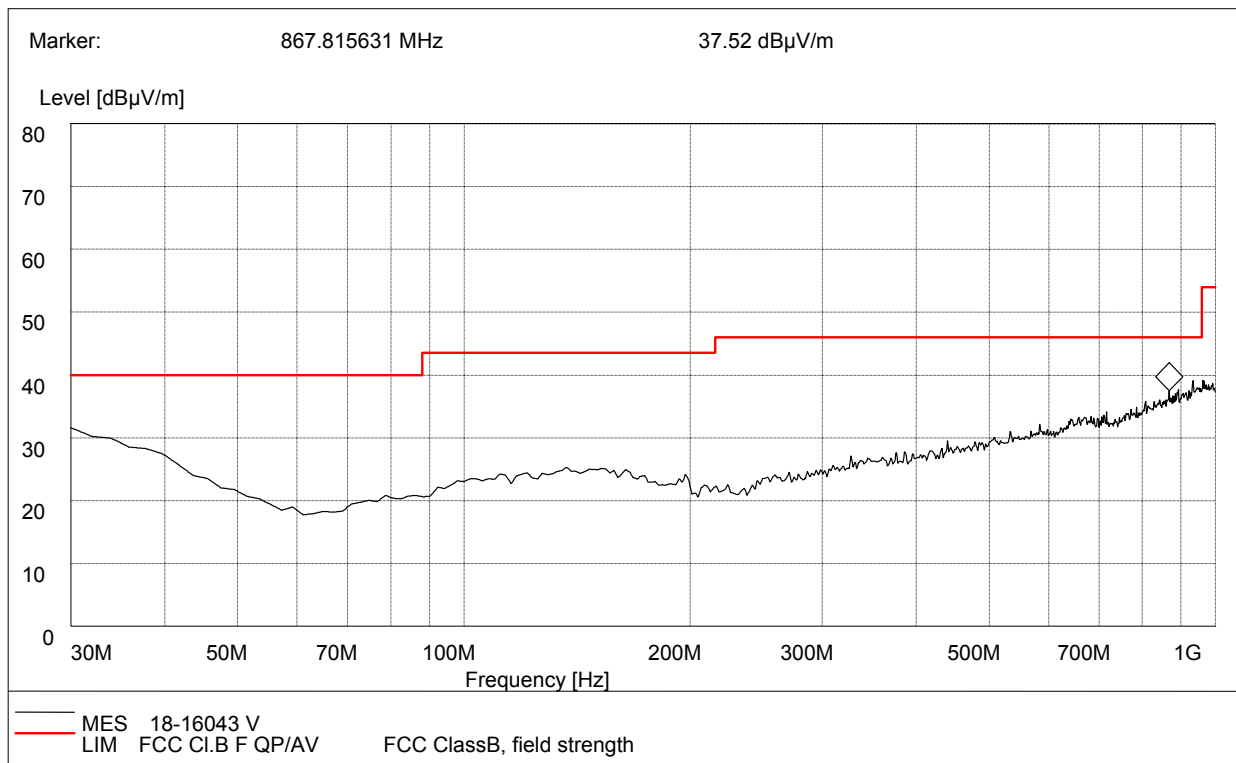


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Antenna	Verdict
30.00	30.17	120.000	123.0	40.00	Horizontal	Pass
136.91	25.30	120.000	126.0	43.5	Horizontal	Pass
164.13	24.93	120.000	129.0	43.5	Horizontal	Pass
440.16	29.50	120.000	120.0	46.00	Horizontal	Pass
716.19	34.15	120.000	211.0	46.00	Horizontal	Pass
867.82	37.52	120.000	136.0	46.00	Horizontal	Pass


**Test Result: PASS**

**E. Radiation disturbances, antenna polarization: Horizontal**

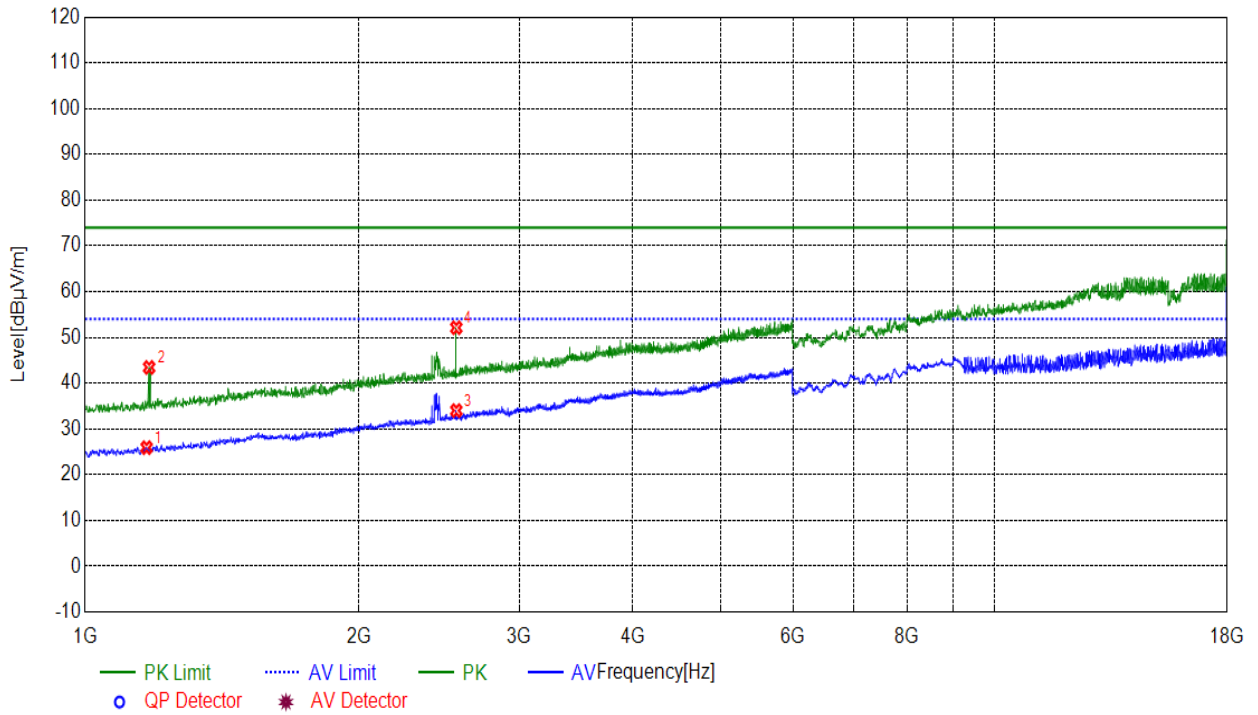

(Plot E: Test Antenna Horizontal 1G – 18G)

**F. Radiation disturbances, antenna polarization: Vertical**

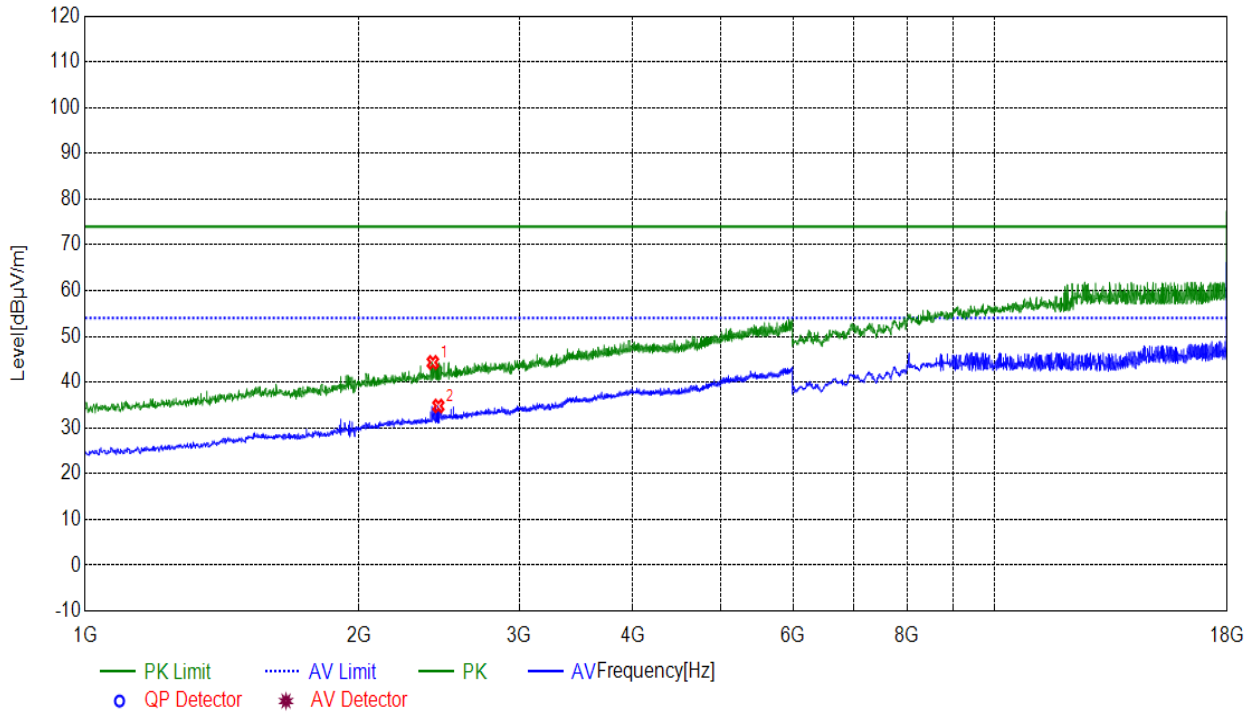

(Plot F: Test Antenna Vertical 1G – 18G)